


CAble-Rail FITTINGS


Quick-Connect® Surface Mount Turnbuckle

Feeney® Quick-Connect® Surface Mount Turnbuckles are Tension Adjustment fittings that can be used for wood or metal railing frames and attach to the inside faces of posts using screws or bolts. Surface Mount Turnbuckles feature 130° pivoting and can be used in stair and level applications for a cohesive look. Use with Feeney Bulk Cable, sold separately.

FEATURES & BENEFITS

- For use with wood or metal frames, stair or level railings
- Made of Type 316 marine-grade stainless steel
- Machined flats allow tools to securely grip the fitting to adjust tension without marring the polished surface
- Adjust tension by spinning the tubular body while holding the Quick-Connect® end with a 3/8" wrench or the Feeney Wrench Wheel
- Attaches with screws or bolts
- Allows for 130° pivoting
- Typically paired with a Surface Mount Fixed End fitting for one run of cable



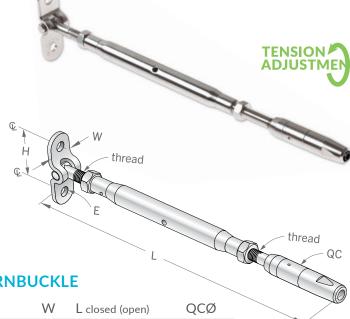



QUICK-CONNECT® SURFACE MOUNT TURNBUCKLE

Part#	CableØ	Thread	ΕØ	Н	W	L closed (open)	QCØ
9902W-PKG	1/8"	1/4-28	1/4"	1-5/16"	5/8"	7-3/4" (11")	7/16"

FEENEY IS A MEMBER OF:















Feeney Quick-Connect® fittings offer the flexibility of assembling cables in the field with simplicity and speed. Patented automatic-locking-jaws grip the cable with no need for specialized tools. Simply trim your cable to length, push the end into the Quick-Connect® fitting, and the spring-loaded jaws automatically engage. You're ready to go!

Made from 316-grade stainless steel for weather-tough durability, low maintenance, and lasting beauty. Fittings also come with a silicone protection seal pre-inserted into the end, providing added protection against dirt and debris entering the body of the fitting. If necessary, our Quick-Connect® Release Tool can be used to disengage and remove or readjust the fitting.

CABLE ASSEMBLIES

There are two types of fittings: Fixed End fittings and Tension Adjustment fittings.

Each cable assembly must include at least one Tension Adjustment fitting.



TENSION ADJUSTMENT FITTINGS

- Include Tensioner fittings, Turnbuckles, Threaded Terminals, and Adjusters
- Tension is adjusted by spinning the tubular body on Tensioners and Turnbuckles, tighting the bolt on ThreadedTerminals, or rotating the bolt on the Adjusters
- Tension Adjustment fittings can be paired with either a Fixed End or another Tension Adjustment fitting.

FIXED END FITTINGS

- Non-adjustable end termination fittings
- No tensioning capabilities
- Must be paired with a Tension Adjustment fitting

NOTE:

CableRail is made of marine grade stainless steel and will last for years with regular maintenance. Learn more: feeneyinc.com/Warranty-and-Care.

EASY INSTALLATION



TRIM CABLE TO LENGTH



INSERT CABLE INTO FITTING



JAWS LOCK AUTOMATICALLY

SPECIALLY ENGINEERED TOOLS FOR CABLERAIL



Quick-Connect® Release Tool

For releasing the Quick-Connect® jaws to remove or adjust fitting.



Wrench Wheel

An easy-to-use tool for tensioning Quick-Connect® Tensioner fittings.



Cable Lacing Needle

For quickly lacing cable ends through posts without snagging.



Cable Tension Guage

Easy-to-use tool for checking cable tension.



Stainless Steel Cleaner Kit

Clean and maintain all stainless steel surfaces, fittings, and cables.